



TITAN[®]

ROAD- AND LINEMARKING



HYDRAULIC PISTON PUMP

PROMARK

Built on the proven Titan PowerLine series with 98:2 and 1:1 mixing ratio, the ProMark offers simple and reliable 2-component spray techniques.



TITAN PROMARK - THE PERFECT ENTRY-LEVEL UNIT FOR 2-COMPONENT COLD SPRAYPLASTICS



HYDRAULIC PISTON PUMP

PROMARK

10 l/min

The perfect entry device for 2-component cold sprayplastics

Features:

Pump pressure
Adjustable up to 220 bar

Max. Delivery
Up to 10 l/min

Material container
48 Liter

Pressurized glass-bead tank
12 Liter

Glass-bead gun

Engine
200 cm³ Honda Motor mit 4,78 kW (6,5 HP), 100 W, with Low-Oil Alert

Line-Gap-Control

Lightweight
227 kg empty

SmartArm™
Can be positioned to spray on left, right, front or rear of striper.

DeadLock Handlebars
3-way easy adjustments

ProMark

The Titan ProMark is the lightest and most inexpensive unit for 2-component cold sprayplastics either with 1:1 or 98:2 mixing ratio. The ProMark is recommended for projects on all parking lots and athletic fields and offers the same practical standard as the PowrLiner.

Auto Actuating Guns



Extreme accuracy gives you the ability to hit the mark everytime; eliminates cable delay.

Pressurized Bead Dispenser




Allows you to optimize bead application to meet today's tough retro reflectivity standards.

On Board Solvent Flush




Makes it easy to keep your equipment clean and in working order.

Line-Gap-Control

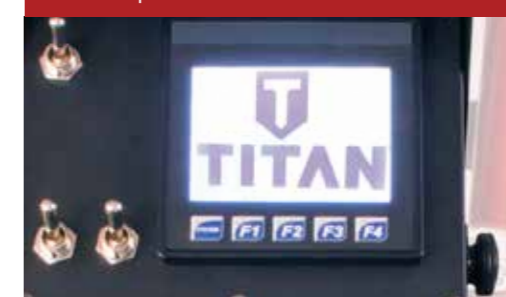

TRACK YOUR PRODUCTION AND PERFORMANCE

- ▶ Speed
- ▶ Pressure
- ▶ Distance
- ▶ Flow
- ▶ Average mils
- ▶ Layout

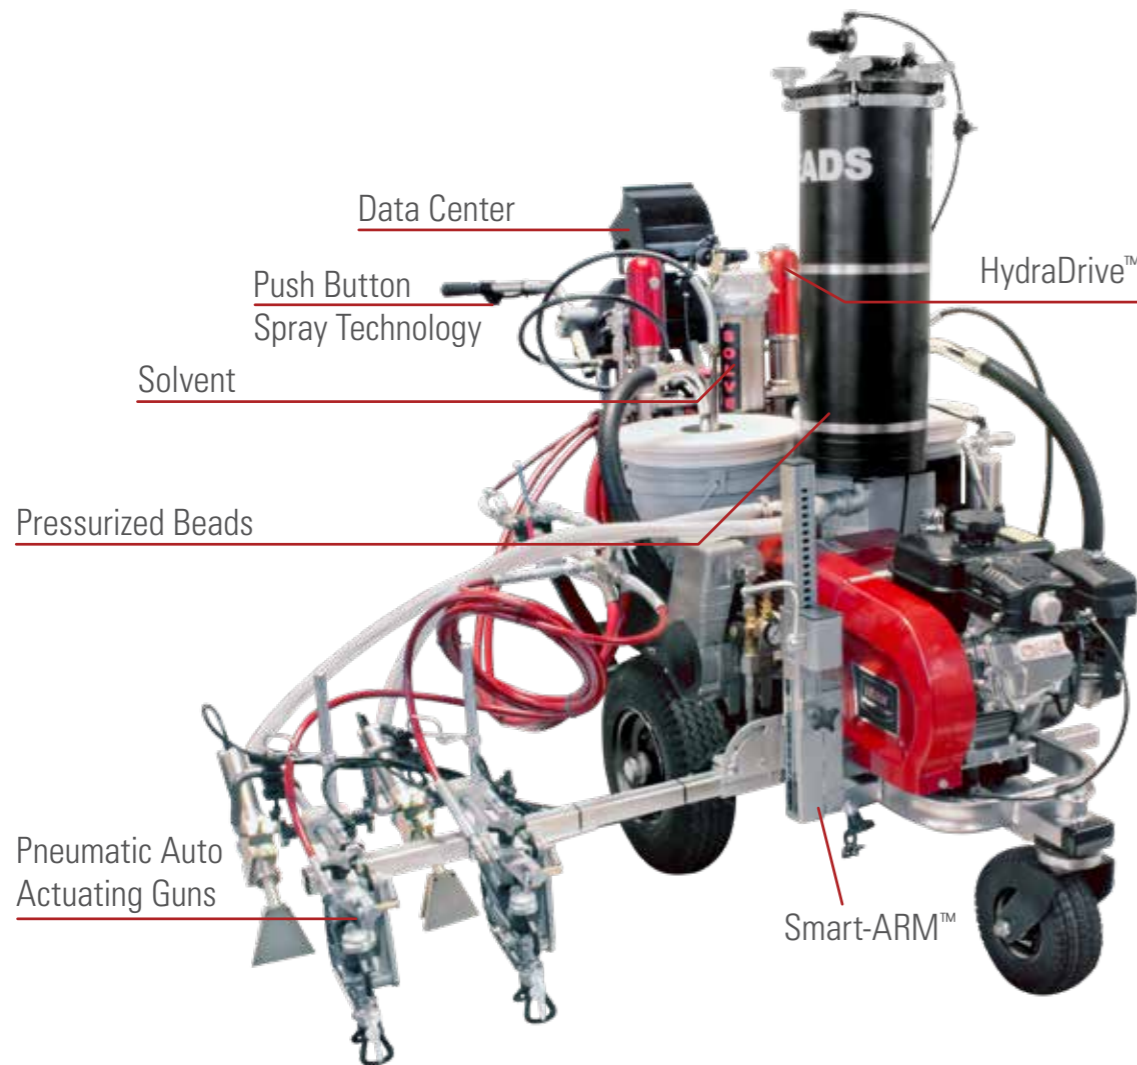

	ProMark 100	ProMark 150	ProMark 200	ProMark 250
SPECIFICATIONS				
Max. Operating Pressure	227 bar	227 bar	227 bar	227 bar
Max. Delivery	10 l/min	10 l/min	10 l/min	10 l/min
Tank	12 Liter	12 Liter	12 Liter	12 Liter
Compressor/Air needed	113 Liter at 8,3 bar	113 Liter at 8,3 bar	113 Liter at 8,3 bar	113 Liter at 8,3 bar
Engine	200 cm ³ Honda motor, 4,78 kW (6,5 HP), 100 W, with Low-Oil Alert	200 cm ³ Honda motor, 4,78 kW (6,5 HP), 100 W, with Low-Oil Alert	200 cm ³ Honda motor, 4,78 kW (6,5 HP), 100 W, with Low-Oil Alert	200 cm ³ Honda motor, 4,78 kW (6,5 HP), 100 W, with Low-Oil Alert
Ratio	1:1 1 Gun	1:1 2 Guns	98:2 1 Gun	98:2 2 Guns
	PART NO.	PART NO.	PART NO.	PART NO.
Line-Gap-Control	ASE8010000AS	ASE8010000AP	ASE8020000AS	ASE8020000AP
No line-Gap-Control	on request	ASE8010000NC	on request	ASE8020000NC



Distributed by:

Sold exclusively through professional distributors
Visit us at: www.titantool.com



All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.
J. Wagner GmbH | Otto-Lilienthal-Str. 18 | 88677 Markdorf | Customer.Service-PF@wagner-group.com | titantool.com