



TITAN[®]

GAS AIRLESS CATALOG



SCAN FOR
DIGITAL COPY





THE BEST AND LONGEST WARRANTY IN THE INDUSTRY

Four-year Manufacturer's Defect

We pledge that our sprayers are free from defects in materials and workmanship. This excludes normal wear items and consumables such as filters, piston, packings, spray tips, spray guns, hoses, etc.

Lifetime DuraLife HE and PMDC Motor Warranty

If the motor fails for any reason (including wear) for as long as you own the sprayer, we will replace the motor at no cost to you.

Limited Lifetime DCX Motor Warranty

If the motor fails from normal usage for as long as you own the sprayer, we will replace the motor at no cost to you.

Gas Engine Warranty

3-year Honda® and 2-years all others.

Two-year Turbine Warranty

Lifetime Drive Train Warranty

If the drive train fails from normal usage for as long as you own

GO TO TITANWEARGUARD.COM FOR MORE INFORMATION



TITAN®

GAS AND CONVERTIBLE AIRLESS

ELITE® SERIES

Perfect for the contractor who is looking for a lightweight, portable sprayer for small- to medium-sized jobs.

OUR MISSION

When your business depends on the tools you use,
you need to be able to count on the people who make them.

Our relentless commitment to helping every professional painter
be their best leads to better work, improved ROI and growing business.

ELITE® GAS SERIES



PermaStroke Technology™

No piston, packings or cylinders to wear out

- One Piece Inlet & Outlet Valves
- 100% Field Serviceable
- Cartridge style valves make repair simple, fast and inexpensive
 - Elite 3500 Valve Kit (537903)
 - Elite 4500 Valve Kit (2419852)

Sealed Hydraulic System

- Has no electronics and no clutch to burn out
- Easy priming guaranteed every time through the Sureflo™ Pusher valve
- Delivers top performance using small or large tip sizes at pressures from 300 to 3300 psi



Flatline Pulsation Dampener™

- Eliminates all pressure fluctuations and deadband in the system
- Provides smooth operation and a consistent finish
- Keep your jobsite clean with Titan's no-spill vertical pump filter that holds coatings in the housing when removed



	Elite 3500	Elite 4500
SPECIFICATIONS		
Max Delivery	0.75 gpm	1.25 gpm
Max Operating Pressure	3300 psi	3300 psi
Max Tip Size (1-Gun)	0.027"	0.036"
Max Tip Size (2-Guns)	----	0.023"
Engine	Honda GX120	Honda GX160
CONFIGURATION		
	PART NO.	PART NO.
High Rider	537012	2407310
Low Rider	537013	2407311



■ The Elite 3500 & 4500 come complete with RX-Pro Gun, 517 TR¹ Reversible Tip and 1/4" x 50' Airless Hose.



Convertible

Easy, tool-free convertibility for projects where gas engines are not permitted.

2 hp Electric Converto Kit sold separately.



Belt Guard

Pivotable housing provides easy access for belt replacement and power source conversion.



Speeflo® HydraDrive™

Smooth, slow-stroking hydraulic drive provides extreme power and reliability.

Severe Service™ 900 Pump

POWRTWIN 4900/6900 PLUS

1.50 / 2.25 gpm

Features:

Accurate Pressure Control

- Ranges from 400 to 3300 psi
- Spray low viscosity primers to heavy-bodied finish paints

Vented Hydraulic Fill and Dip Stick

Easy access for less mess

Easy-Remove Filter

Only 3 turns to remove

Wrap Around Frame

For extra strength and stability

High Efficiency Cooling Fan

Keeps the hydraulics cooler for longer life

Heavy-Duty Frame

Durable cart with telescoping handle and convenient lift handles

Honda GX160 Engine

Dependable, gas-powered engine with low-oil alert

Convenient Pail Hook



POWRTWIN 8900/12000 PLUS

2.50 / 3.15 gpm

Recommended for up to
400/500+ gallons per week.

Features:

Accurate Pressure Control

- PowrTwin 8900 Plus: Operating pressure ranges from 400 to 3300 psi
- PowrTwin 12000 Plus: Operating pressure ranges from 400 to 3600 psi
- Both spray low viscosity primers to heavy-bodied finish paints, block filler and elastomerics

Quick Removal Filter

Access filter in just 3 turns


Wrap Around Frame

For extra strength and stability

High Efficiency Cooling Fan

Keeps the hydraulics cooler for longer life

Heavy-Duty Frame

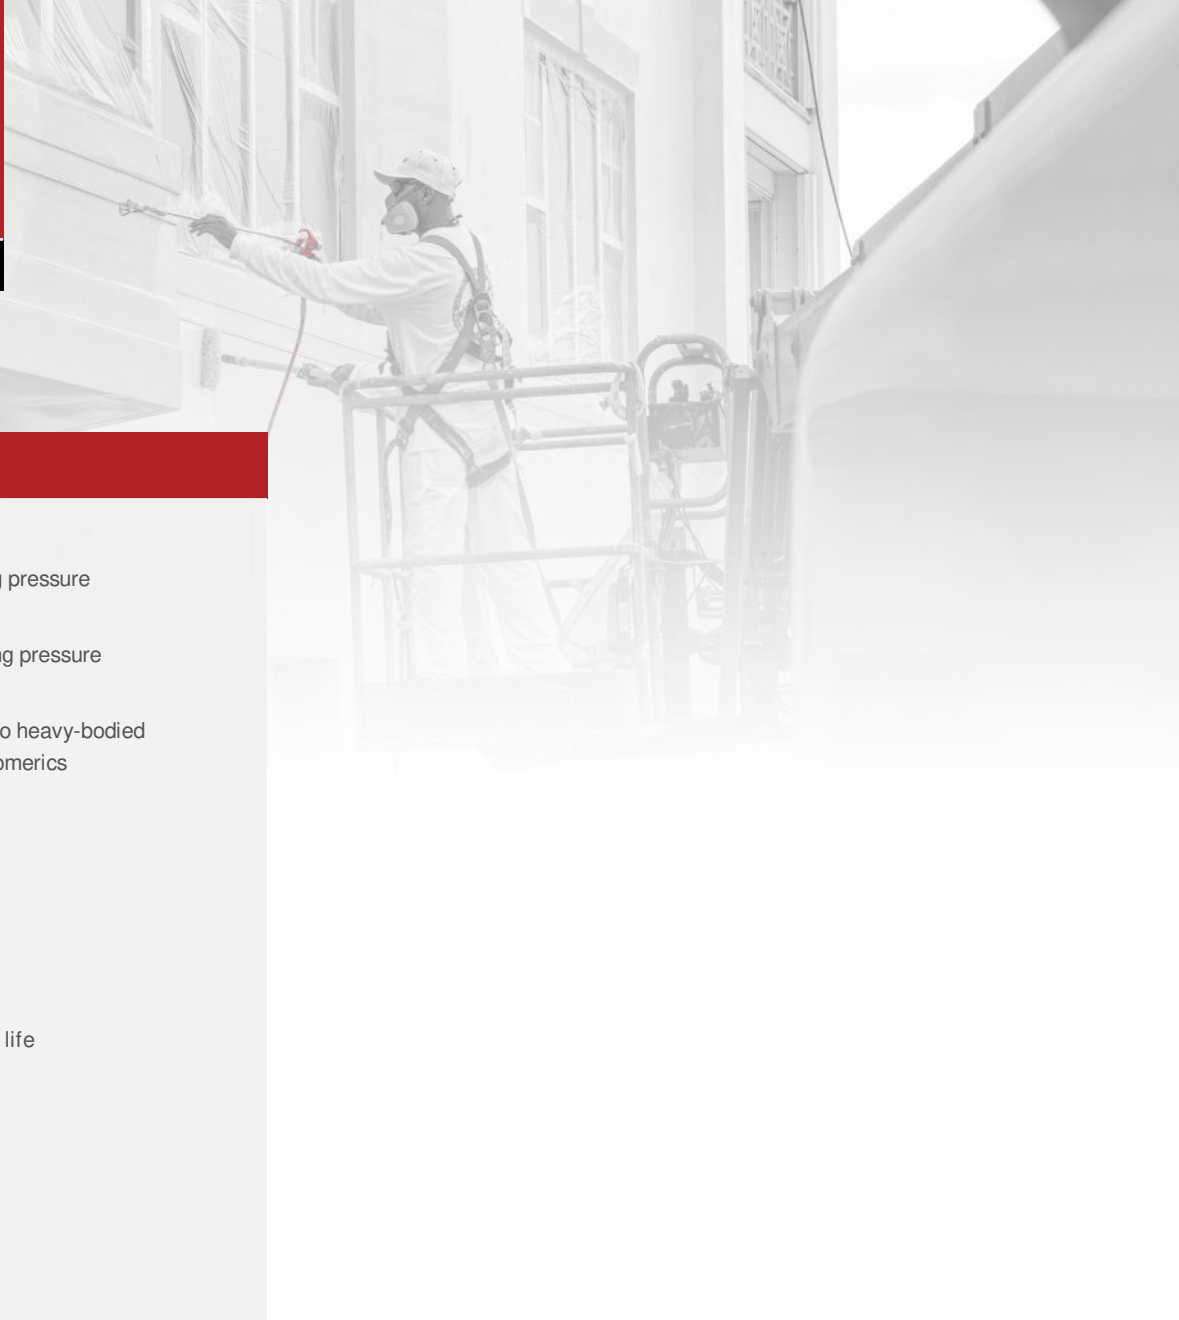



PowrTwin 6900 Plus DI

Configured with a submersible foot valve designed for very heavy materials, including drywall mud.

PowrTwin 12000 Plus DI

The flagship of the line and is recommended for very large scale projects where up to 6 guns may be needed, or application of very heavy coatings. The most portable roofing sprayer ever.

	PowrTwin 6900 Plus DI (Electric)	PowrTwin 6900 Plus DI (Gas)	PowrTwin 12000 Plus DI
SPECIFICATIONS			
Max Delivery	1.25 gpm		



HydraStroke® Technology

- Unmatched durability and performance powered by electronically-controlled hydraulics
- Unlike clutch units that small tips can damage, PowrBeast units have the versatility to spray heavy and light bodied coatings with ease
- Hydraulic motor is optimized with one moving part, reducing heat and

Severe Service™ Fluid Section

- Long and slow stroking piston maximizes power and durability
- Proven Titan technology with 35 years in the field
- Field serviceable with easy to remove/replace fluid section

Smart Design

- Extremely efficient cooling system
- Move your sprayer wherever its needed with large 12" pneumatic tires for increased portability and travel over rough surfaces
- Simplified pump assembly for easier service



	PowrBeast 7700	PowrBeast 9700
SPECIFICATIONS		
Max Delivery	2.00 gpm	3.00 gpm
Max Operating Pressure	3300 psi	3300 psi
Max Tip Size (1-Gun)	0.047"	0.055"
Max Tip Size (2-Guns)	0.033"	0.039"
Max Tip Size (3-Guns)	0.027"	0.031"
Max Tip Size (4-Guns)	0.023"	0.027"
Max Tip Size (5-Guns)	----	0.023"
Engine	Honda GX200	Honda GX270
Part Number	537005	537007



■ The PowrBeast 7700 and 9700 sprayers come complete with RX-Pro Gun, 517 TR' Reversible Tip and 1/4" x 50' Airless Hose.

HYDRA

Hydra Pro IV

High-production unit for all architectural coatings, dry wall mud, epoxies, most mastics and elastomeric roof coatings.

Hydra M 4000

Delivers the added pressure needed for hard-to-atomize coatings or long hose runs.

	Pro IV	M 4000
SPECIFICATIONS		
Max Delivery	2.50 gpm	3.30 gpm
Max Tip Size	0.050"	0.060"
Max Operating Pressure	3300 psi	4000 psi
Cycles Per Gallon	24	13
Engine	Honda GX270	Honda GX390
CONFIGURATIONS		
Filter Model	433-820	433-801
3/4" Outlet Model	----	433-800

HYDRA X SERIES



Hydra X 4540

	Hydra X 4540	Hydra X 7230
SPECIFICATIONS		
Max Delivery	4.0 gpm (15.1 lpm)	3.0 gpm (11.4 lpm)
Max Tip Size (1-Gun)	0.067"	0.057"
Max Tip Size (2-Guns)	0.043"	0.035"
Max Tip Size (3-Guns)	0.035"	0.031"
Max Tip Size (4-Guns)	0.031"	0.027"
Max Tip Size (5-Guns)	0.025"	0.021"
Max Tip Size (6-Guns)	0.021"	----
Max. Operating Pressure	4500 psi	7250 psi
Cycles Per Gallon	15	23
Volumetric Flow per Double Stroke	247 cc	162 cc
Part No.	2412275	2412277

**WEARGUARD CONVENIENCE PROGRAM
KEEPS YOU UP AND RUNNING**

When you purchase a new Titan sprayer, you're able to take advantage of our exclusive WearGuard Convenience Program. Protect your investment by purchasing a spare fluid section or PermaStroke kit at a discounted rate. Save yourself the time and frustration of an extra trip or waiting for parts to arrive in the event that your sprayer goes down. When you have a backup fluid

**KEEP TITAN WITH YOU
WHEREVER YOU GO**